


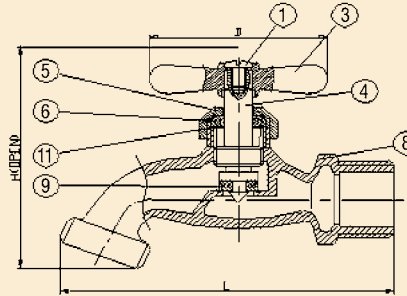
PLUMBING VALVES






PREMIUM HOSE BIBB

- 125# WOG
- Cast Brass
- Heavy Duty Configuration

- ANSI/NSF 61.8 Approved (Low Lead)
- ISO 9001 Manufacturer

No.	Part	Materials Specification
①	Screw	Forged Steel ASTM - AISI-1010
③	Handle	Zinc Alloy ASTM B-86
④	Stem	Cast Brass ASTM B-584, C85700
⑤	Packing Nut	Brass ASTM B-16, C36000
⑥	Gland Packing	PTFE
⑦	Bonnet	Cast Brass ASTM B-584, C85700
⑧	Body	Cast Brass ASTM B-584, C85700
⑨	Seat Packing	Rubber
⑩	Seat Packing Screw	Brass ASTM B-134, C27000
⑪	Washer	Stainless Steel 304



190 166 SERIES HOSE BIBB (MIP X MHT)							190 166	190 167	190 168
Size	Fig. #	Weight	Box/Case	L	H	D			
1/2	190 166 G	0.48	15/90	4.72	2.36	3.83			
3/4	190 166 I	0.53	15/90	4.72	2.36	3.83			
190 167 SERIES NO-KINK HOSE BIBB (COMP X MHT)									
Size	Fig. #	Weight	Box/Case	L	H	D			
1/2	190 167 G	0.48	15/90	1.46	2.28	2.36			
190 168 SERIES NO-KINK HOSE BIBB (FIP X MHT)									
Size	Fig. #	Weight	Box/Case	L	H	D			
1/2	190 168 G	0.48	15/90	1.46	2.28	2.36			
3/4	190 168 I	0.53	15/90	1.46	2.28	2.36			
190 169 SERIES NO-KINK HOSE BIBB (MIP X MHT)									
Size	Fig. #	Weight	Box/Case	L	H	D			
1/2	190 169 G	0.48	15/90	1.46	2.28	2.36			
3/4	190 169 I	0.53	15/90	1.46	2.28	2.36			
190 169 IG SERIES NO-KINK HOSE BIBB (FEM./MALE SWT. X MHT)									
Size	Fig. #	Weight	Box/Case	L	H	D			
1/2 or 3/4	190 169 IG	0.54	15/90	1.46	2.28	2.36			