


CHECK VALVES

PREMIUM BRASS SWING CHECK VALVES

- 200# WOG / 125# WSP
- Cast Brass
- Forged Brass Disc

- Machined Sealing Surface
- ANSI/NSF 61.8 Approved (Low Lead)
- ISO 9001 Manufacturer

No. Part	Materials Specification
① Cap	Cast Brass ASTM B584-C85700
② Body	Cast Brass ASTM B584-C85700
③ Disc	Forged Brass ASTM B124-C37700
④ Pin	Brass ASTM B16-C36000
⑤ Screw	Brass ASTM B16-C36000

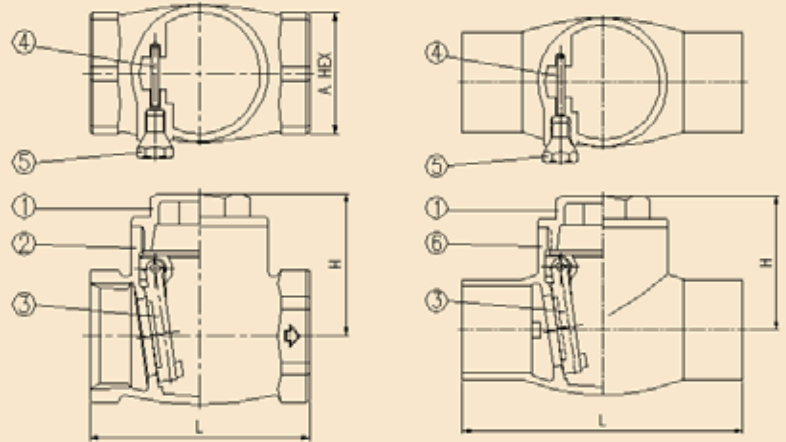

173 9191 SERIES SWING CHECK VALVE, THREADED

Size	Fig. #	Weight	Box/Case	L	H
1/2"	173 9191G	0.34	10/160	2.05	1.50
3/4"	173 9191I	0.62	10/120	2.32	1.58
1"	173 9191K	0.90	6/72	2.72	1.77
1-1/4"	173 9191L	1.33	5/60	3.11	2.01
1-1/2"	173 9191M	1.84	4/32	3.51	2.17
2"	173 9191N	2.75	2/24	4.29	2.64
2-1/2"	173 9191P	6.00	2/12	5.32	3.31
3"	173 9191Q	8.67	1/6	6.30	3.78
4"	173 9191T	14.50	1/4	7.49	4.45



173 9192 SERIES SWING CHECK VALVE, SOLDER END

Size	Fig. #	Weight	Box/Case	L	H
1/2"	173 9192G	0.43	10/160	2.09	1.50
3/4"	173 9192I	0.63	10/120	2.96	1.58
1"	173 9192K	0.76	6/72	3.62	1.77
1-1/4"	173 9192L	1.37	5/60	4.06	2.01
1-1/2"	173 9192M	1.94	4/32	4.53	2.17
2"	173 9192N	3.04	2/24	5.48	2.64
2-1/2"	173 9192P	4.55	1/8	6.88	3.06
3"	173 9192Q	6.25	1/6	7.63	3.75

