


PLUMBING VALVES

PREMIUM STOP & DRAIN VALVES

- 125# WOG
- Cast Brass
- ANSI/NSF 61.8 Approved (Low Lead)

- CSA Approved
- ISO 9001 Manufacturer

No.	Part	Materials Specification
①	Nut	Forged Steel ASTM - AISI-1010
②	Name Plate	Aluminum ASTM B-209, Alloy 1100
③	Handwheel	Cast Iron ASTM A-48, Class No. 35
④	Stem	Cast Brass ASTM B-584, C85700
⑤	Packing Nut	Brass ASTM B-16, C36000
⑥	Packing	PTFE
⑦	Bonnet	Cast Brass ASTM B-584, C85700
⑧	Body	Cast Brass ASTM B-584, C85700
⑨	Seat Disk	NBR
⑩	Seat Disk Screw	Brass ASTM B-134, C27000
⑪	Drain Packing	NBR
⑫	Drain Nut	Brass ASTM B-16, C36000

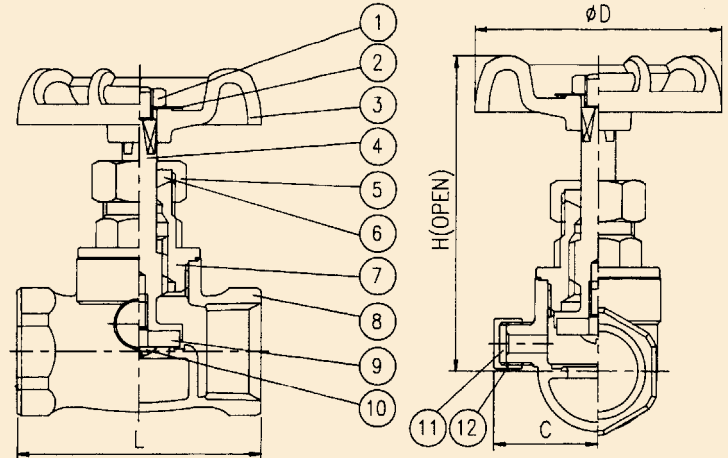

190 132 SERIES STRAIGHT STOP, THREADED

Size	Fig. #	Weight	Box/Case	L	H	D		
1/2	190 132 G	.53	14/84	2.13	2.64	2.13		
3/4	190 132 I	.59	14/84	2.17	2.64	2.13		

190 136 SERIES STRAIGHT STOP & DRAIN, THREADED

Size	Fig. #	Weight	Box/Case	L	H	D	C	
1/2	190 136 G	0.49	14/84	2.13	2.64	2.13	0.91	
3/4	190 136 I	0.58	12/72	2.17	2.64	2.13	0.98	

190 142 SERIES STRAIGHT STOP, SOLDER END

Size	Fig. #	Weight	Box/Case	L	H	D	C	
1/2	190 142 G	0.45	14/84	2.17	2.64	2.13	0.91	
3/4	190 142 I	0.55	12/72	2.72	2.64	2.13	0.98	

190 146 SERIES STRAIGHT STOP & DRAIN, SOLDER END

Size	Fig. #	Weight	Box/Case	L	H	D	C	
1/2	190 146 G	0.47	14/84	2.17	2.64	2.13	0.91	
3/4	190 146 I	0.57	12/72	2.72	2.64	2.13	0.98	

190 132



190 136



190 142



190 146

